




Notes:

35. Reconnect the Rear Brake Switch and secure the wiring to the Subframe with a cable tie. Note: Make sure that the wiring is clear of the exhaust.

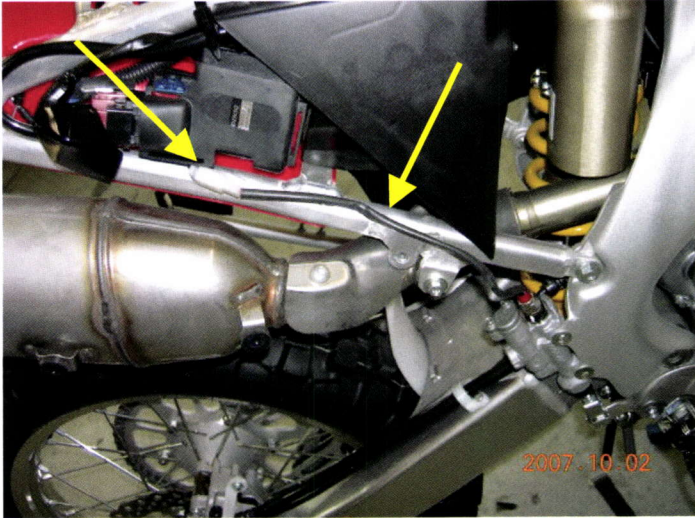


36. Refit the Fuel Tank, Seat and Side Covers in the reverse order of removal.

37. Start the motorcycle and ensure that everything is working correctly.

**38. Before Test Riding the motorcycle, check to ensure that all wiring is secured and routed where it will not be damaged.**

33. Reconnect the Main Power Relay wiring.

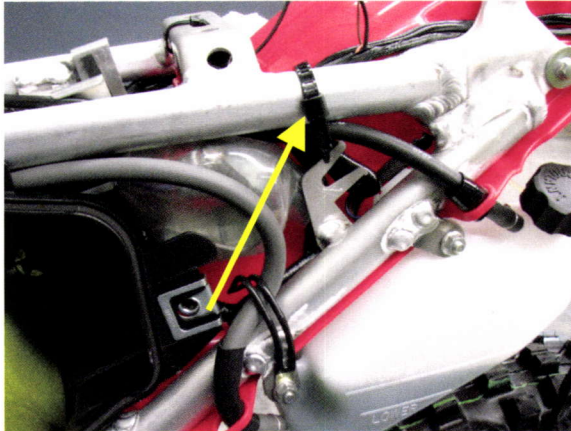

34. Reconnect the Tail Lamp to the Competition Loom, making the following wiring changes:

- b. Brown Wire to the Yellow Wire.
- c. Green Wire to the Green Wire.
- d. Green/Yellow Wire to the Blue Wire.

